




ICE25 & ICE40 CLEANABLE TITANIUM HEAT EXCHANGERS

KEY ADVANTAGES

- Grade 1 spiralled titanium for high heat transfer and increased efficiency.
- Removable black nylon case for easy cleaning of titanium coil.
- Reinforced glass nylon case for high durability.
- Heat exchangers can be mounted vertically or horizontally to suit requirements.
- Flow switch can be factory fitted into case for detecting water flow.
- Titanium pocket can be fitted into heat exchanger for water temperature sensing probe.





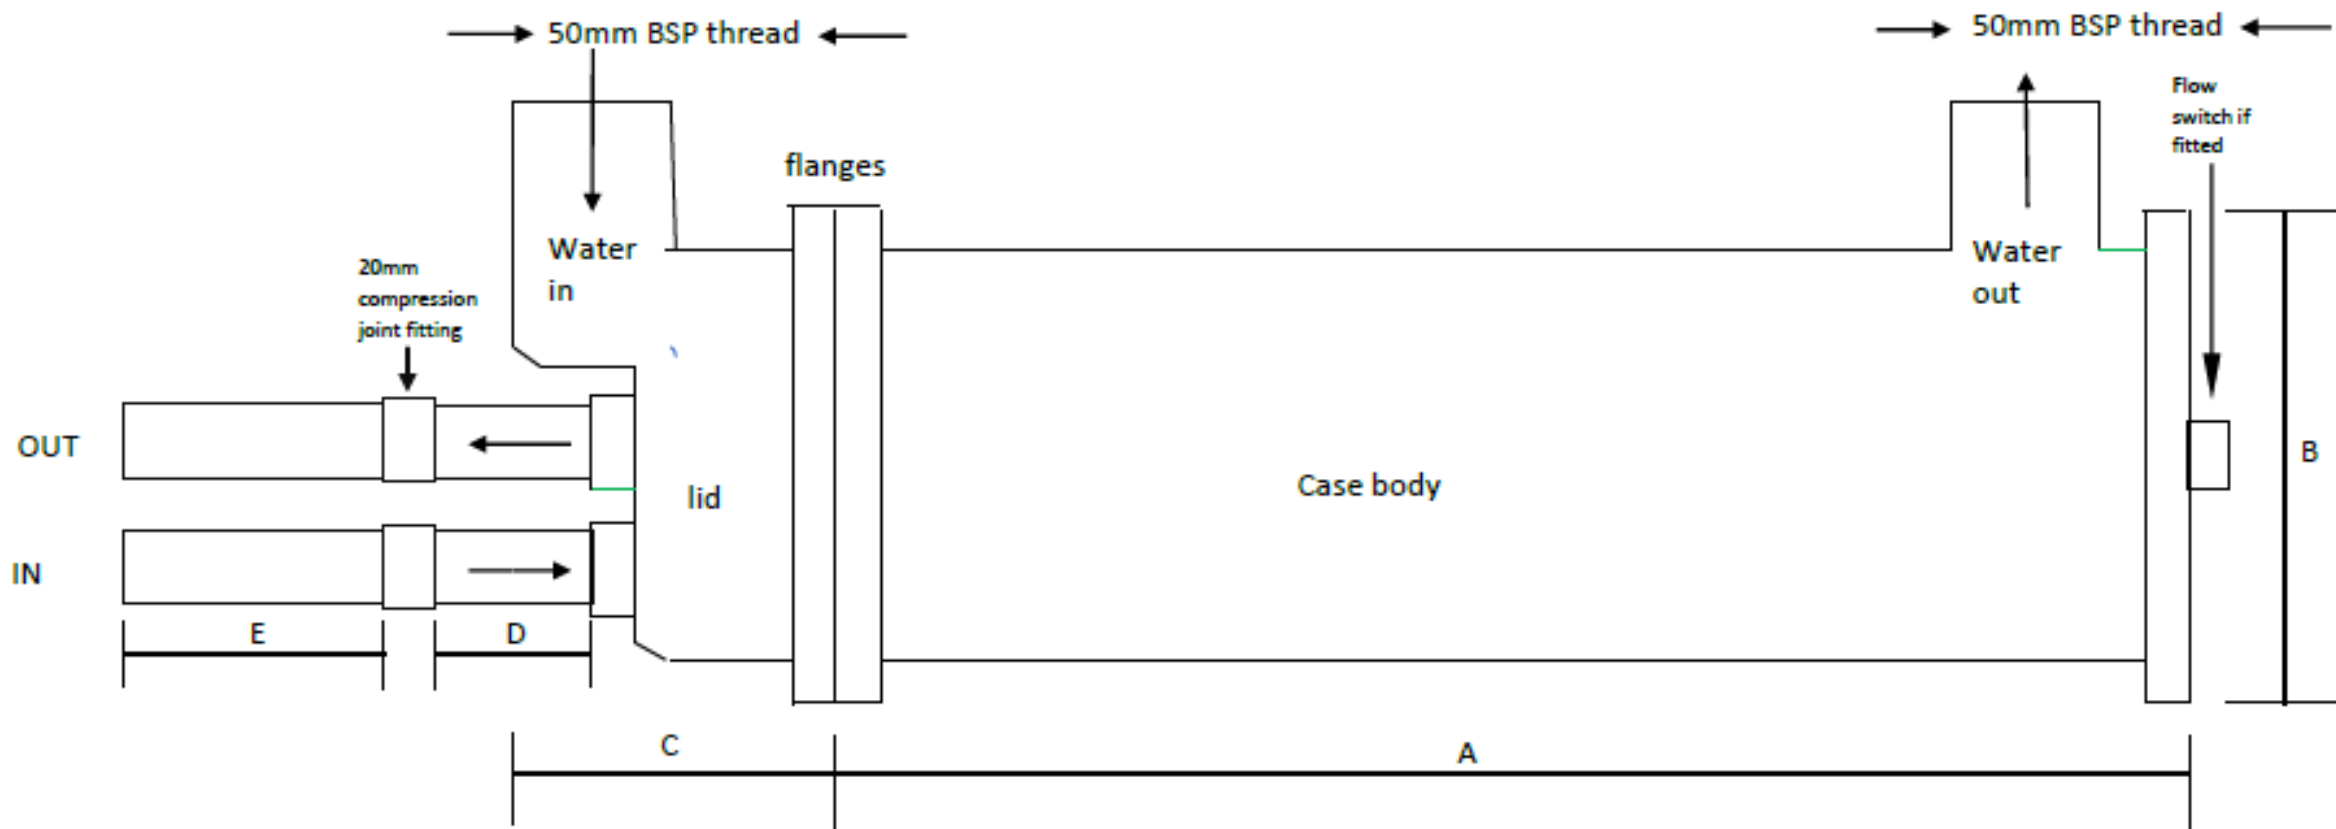

A	388mm
B	210mm
C	126mm
D	Approx. 60mm 19.5mm titanium tube
E	Approx. 100mm 3/4" OD copper tube

	ICE25	ICE40
Heating kW	25	40
Cooling kW	12	18
Water Flow	>100 L/Min	>150 L/Min
Nominal capacity based on cooling +7c LWT 35 ambient, heating +27c LWT 19 ambient dry bulb.		

FRONT VIEW

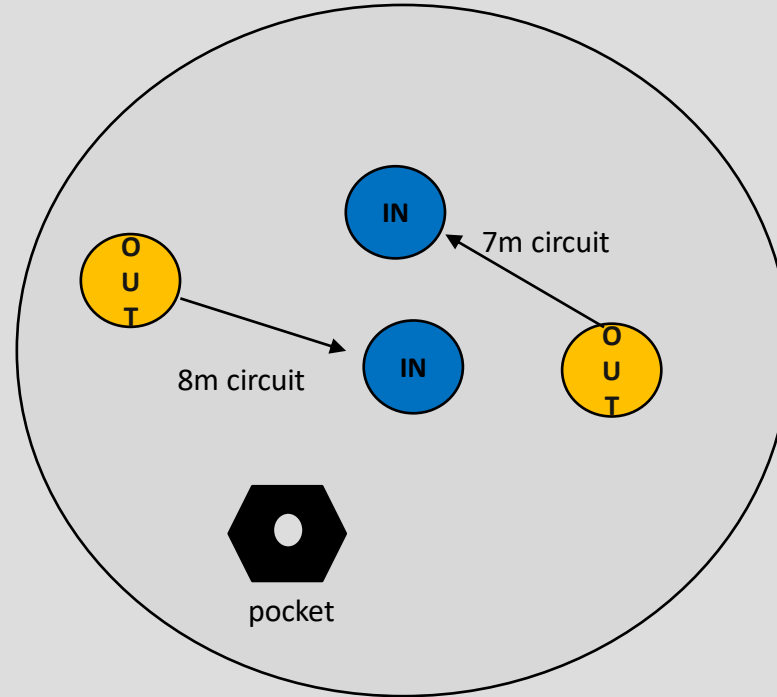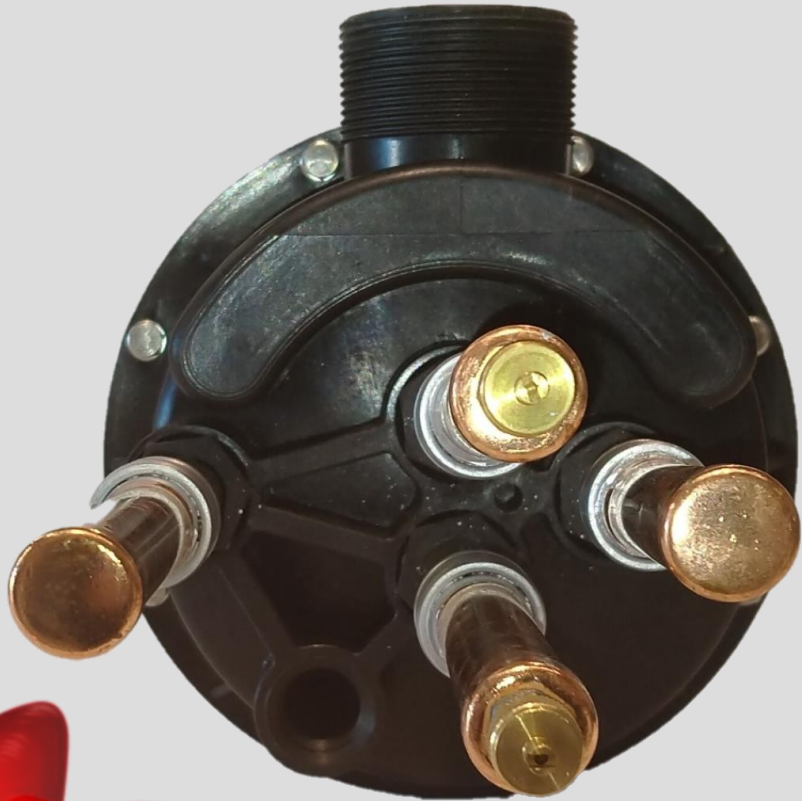

- The ICE25 has 1 x 8 metre titanium coil.
- The ICE40 has 1 x 7 metre 1 x 8 metre titanium coils.
- Multiple heat exchangers can be used to achieve required capacity with water piping in series and titanium coils in parallel.


SIDE VIEW



ICE25



ICE40

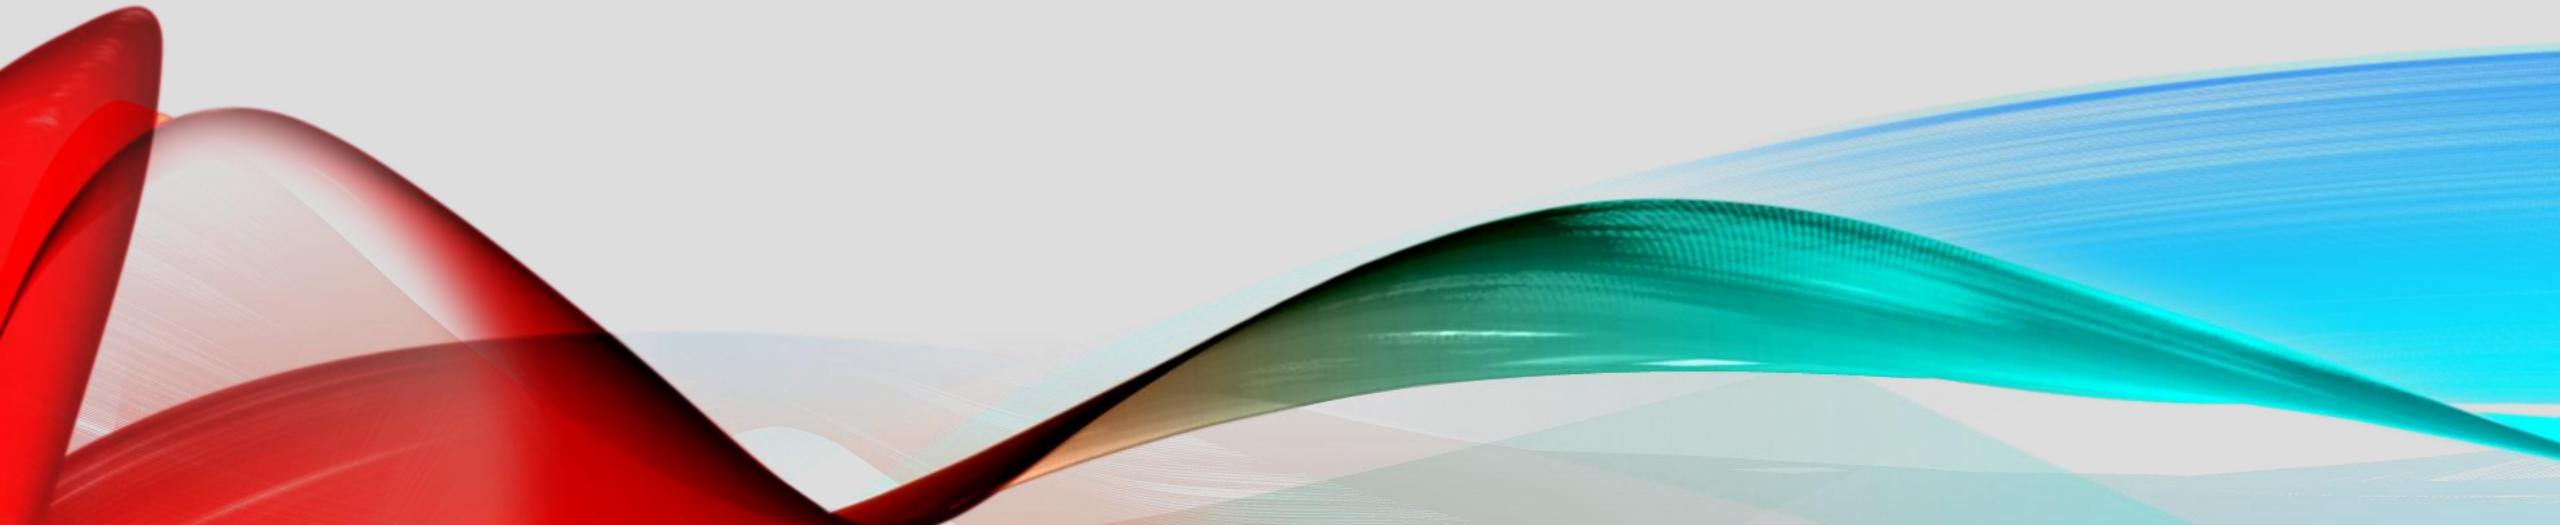


OPEN VIEW



ICE25



ICE40

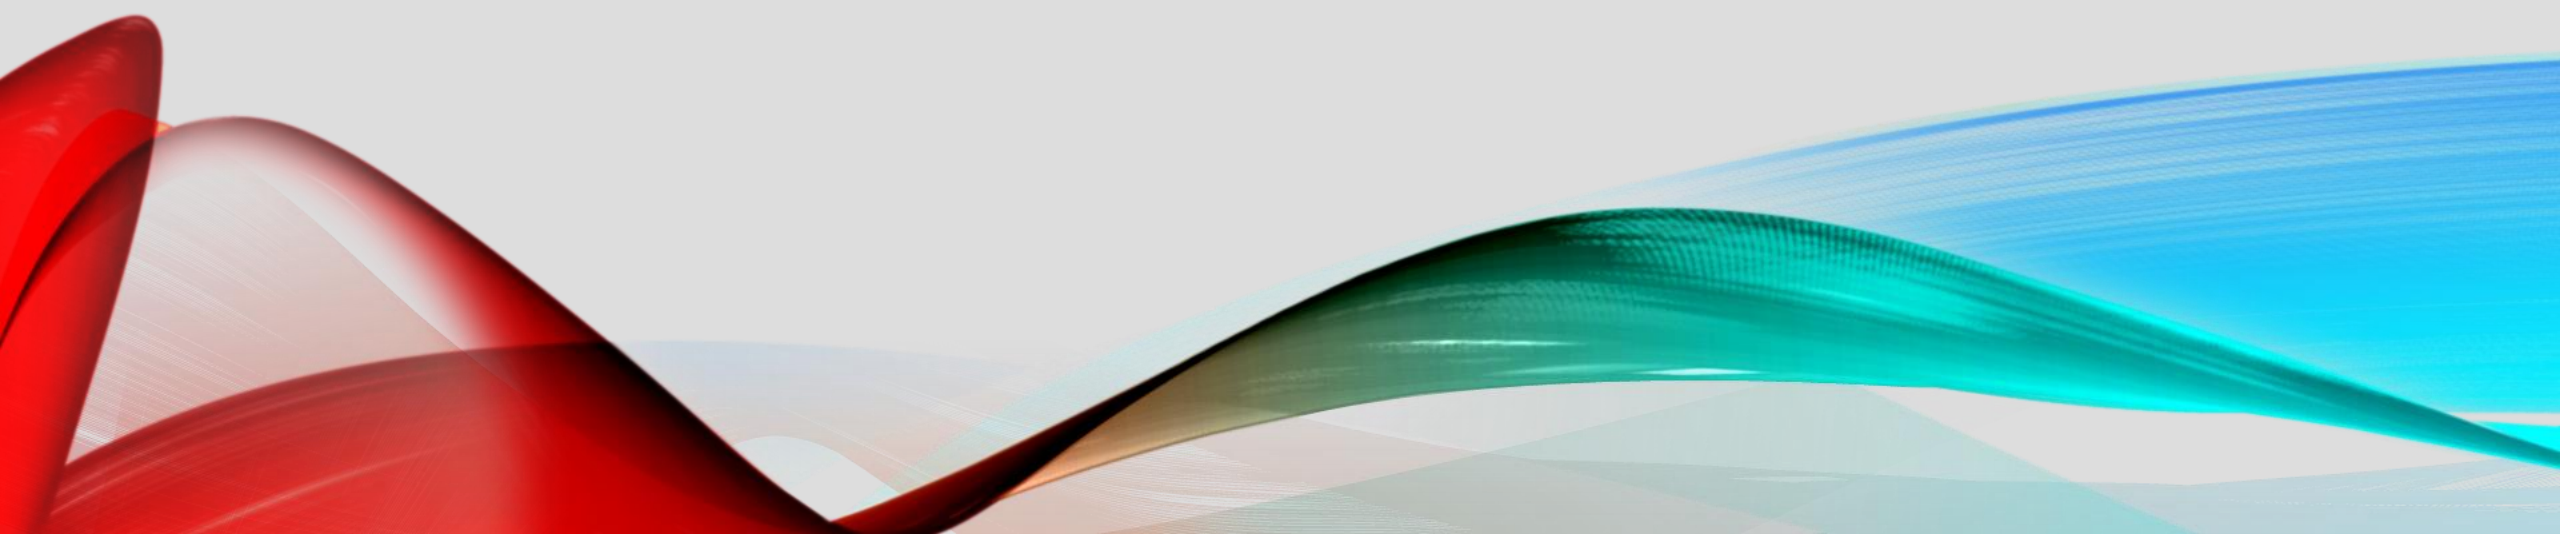



For further information and advice on sizing the correct heat exchanger for your needs please contact us.

Ice Cycle (NZ) Ltd
78E Austin Street, Onekawa, Napier 41 10
Phone: 06 8422956
Email: technical@icecycle.co.nz
Website: www.icecycle.co.nz